
12-9

(12V 9AH/20hr)

Product Image



Product Dimensions

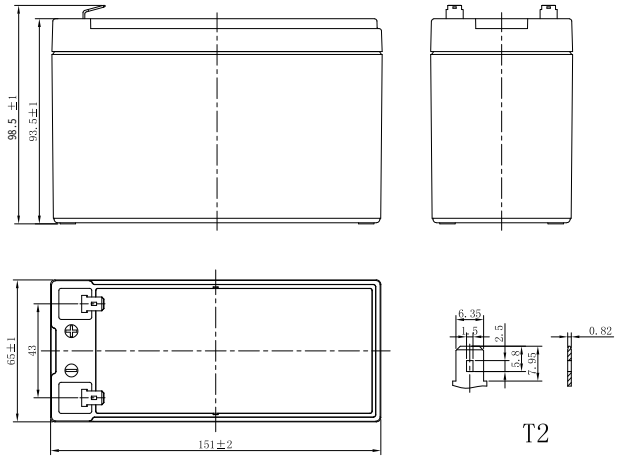

Characteristics

Nominal Voltage		12V
Nominal Capacity (20 hour rate)		9Ah
Capacity 25℃(77°F)	10 hour rate (0.851A)	8.5Ah
	5 hour rate (1.55A)	7.75Ah
	1 hour rate (4.62A)	5.66Ah
Internal Resistance	Full Charged Battery 25℃	≤22mΩ
Capacity affected by Temperature (10 hour)	40℃ (104°F)	102%
	25℃ (77°F)	100%
	0℃ (32°F)	85%
	-15℃ (5°F)	65%
Self-Discharge 25℃(77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25℃ (77°F)	Float	Initial Charging Current Less than 2.7A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 2.7A Voltage 14.4-15.0V

Packaging

Battery Dimensions	Length	151mm
	Width	65mm
	Height	93.5mm
	Total Height	98.5mm
Box Dimensions	Length	364mm
	Width	330mm
	Height	130mm
Quantity Per Box		10 pcs per box
Net weight Per Cell		2.45kg±100g
Net weight Per Box		24.5kg
Gross Weight		25.0kg

Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	30.2	20.7	16.1	12.9	9.34	6.72	5.41	3.08	2.22	1.77	1.51	1.29	1.02	0.832	0.440
1.80V/cell	32.4	21.9	16.9	13.4	9.63	6.90	5.54	3.14	2.26	1.80	1.53	1.31	1.03	0.843	0.445
1.75V/cell	34.2	22.8	17.4	13.8	9.88	7.05	5.66	3.19	2.30	1.82	1.55	1.33	1.04	0.851	0.450
1.70V/cell	35.8	23.7	18.0	14.2	10.1	7.21	5.76	3.24	2.33	1.85	1.57	1.34	1.05	0.860	0.454
1.67V/cell	37.0	24.4	18.5	14.5	10.3	7.32	5.85	3.28	2.35	1.86	1.58	1.35	1.06	0.866	0.457
1.60V/cell	39.3	25.4	19.1	14.9	10.6	7.50	5.98	3.34	2.40	1.90	1.61	1.37	1.08	0.877	0.462

Constant Power Discharge (Watts/cell) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	57.1	39.4	30.8	24.8	18.1	13.0	10.5	6.03	4.37	3.49	2.98	2.55	2.02	1.65	0.880
1.80V/cell	60.8	41.4	32.1	25.7	18.5	13.3	10.8	6.13	4.43	3.53	3.02	2.59	2.04	1.67	0.890
1.75V/cell	63.3	42.8	33.0	26.2	18.9	13.6	10.9	6.22	4.49	3.58	3.05	2.62	2.06	1.69	0.900
1.70V/cell	65.7	44.2	33.9	26.9	19.3	13.8	11.1	6.30	4.55	3.62	3.09	2.64	2.08	1.71	0.907
1.67V/cell	67.4	45.2	34.6	27.4	19.6	14.0	11.2	6.36	4.59	3.65	3.11	2.67	2.10	1.72	0.914
1.60V/cell	70.1	46.5	35.6	28.0	20.0	14.3	11.4	6.46	4.66	3.71	3.15	2.70	2.13	1.74	0.924

12-9
(12V 9AH/20hr)


Discharge Characteristics

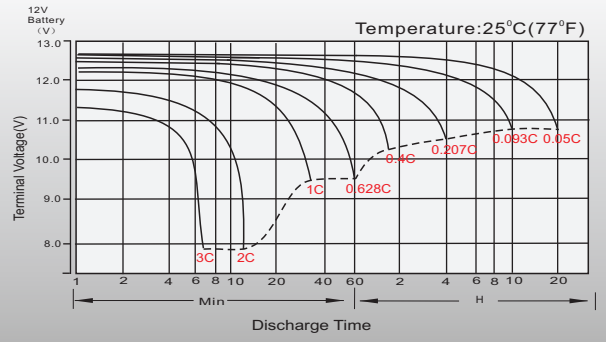


Float Charging Characteristics

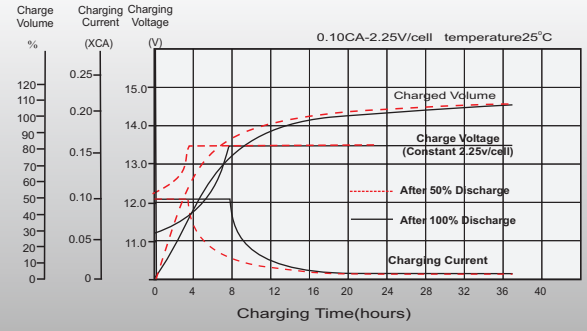


Temperature Effects in Relation to Battery Capacity

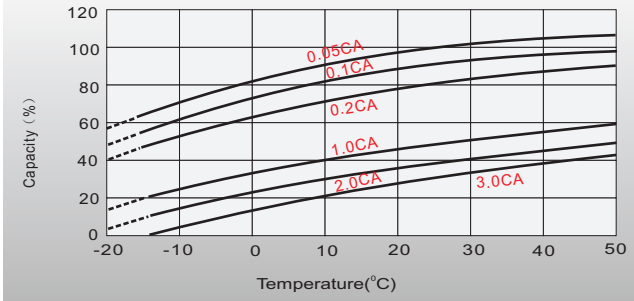


Effect of Temperature on Long Term Float Life

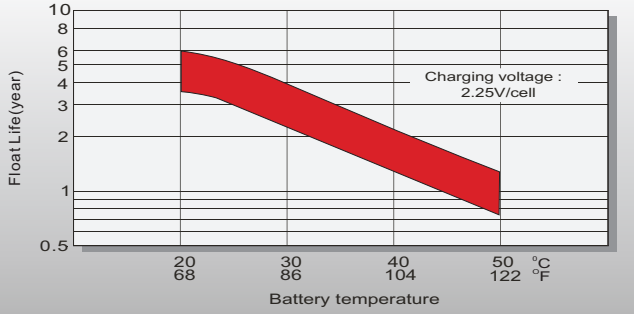

Cycle Life in Relation to Depth of Discharge

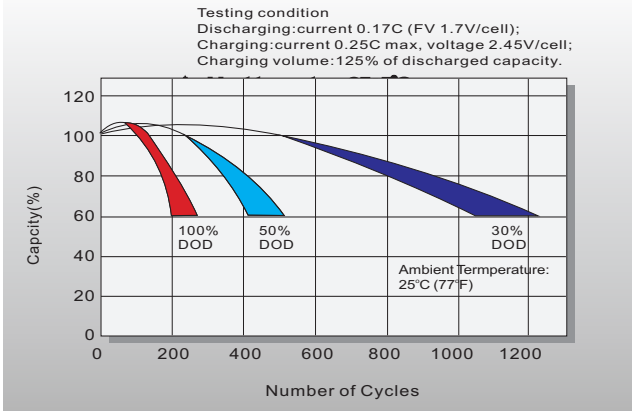

Self Discharge Characteristics

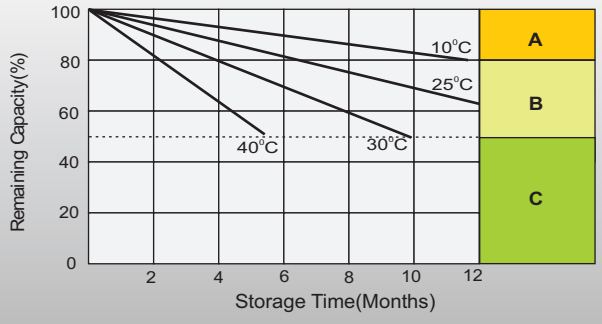

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid